



# Water Leak Detection System



## Addressable Water leak detection Cables (WD-AS)

---

### General Description:-

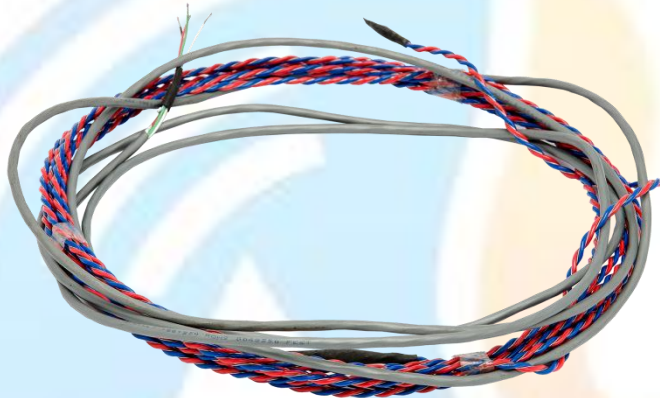

### Features -:

- Water Leak Detection cable consists of four conductors, two water sensitive and two data.
- The cable is restorable and corrosion resistant and does not require replacement after being wet.
- Cable can be installed in the path of a potential water leak.

## Specifications:

- Material : PVC twisted pair with stainless steel 316 elements
- Leader Cable : 3 mtrs. (Belden Cable)
- Dimensions : 3.5mm dia.
- Cable lengths : It comes in multiple of 5mtrs
- Guarantee : 12 months from the date of supply.

## Installation and Testing :-

- Installation: Install the WLD cable on the floor. Connect the leader end of WLD cable to WLD Panel.
- Testing: Immerse the WLD cable in water to stimulate a water leak. An alarm will be sent to WLD Panel and the display the leak distance in meters. Dry the WLD Cable to restore in normal mode.